

上偉科技



# RADAR<sup>®</sup> 雷達牌產品系列

PRODUCT SERIES

## LIQUID LEVEL CONTROL SWITCH

## PRESSURE CONTROL SWITCH





水位開關

## ST-65AB Water Level Switch

- 3/4" threaded, completed with L-bracket for easy mounting, two floats to assure steady control.
- Power : 110/220V 1HP, Contacts A and B, single throw.
- 設有3/4"牙頭及L架按裝容易、雙浮球。
- 使用電壓：110/220V 1HP 單切、雙能、A.B.接點。



油位開關

## STR-101 Oil Level Switch

- Application : For oil and chemical fluid. Burst proof calcium carbide formed casing, with stainless steel bob.
- Power Source : 110/220V 3A, Contacts A and B.
- 適用：油類、化學液體、防滴主體外殼電木成型，不銹鋼吊錘。
- 使用電壓：110/220V 3A AB 接點。




Pat No.M281029

水位開關

## ST-70AB Water Level Switch

- 1" or 3/4" thread, fittings completed with L-bracket for easy mounting, two floats to assure steady control.
- Power : 110/220V 1HP, Contacts A and B, single throw.
- 設有1", 3/4"二種牙頭及L架按裝容易，雙沉球、透氣功能。
- 使用電壓：110/220V 1HP 單切、雙能、A.B.接點。

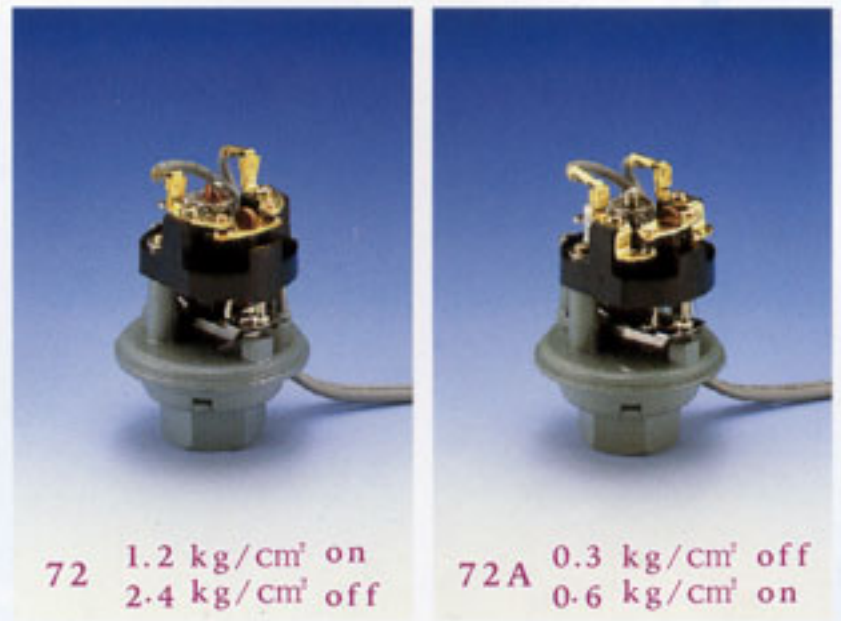

72 1.2 kg/cm<sup>2</sup> on  
2.4 kg/cm<sup>2</sup> off

72A 0.3 kg/cm<sup>2</sup> off  
0.6 kg/cm<sup>2</sup> on

## STR-72 Pressure Switch

- Factory-set pressure for 1.2~2.4kg/cm<sup>2</sup> (Accept your specified pressure between 0.5~3.5kg/cm<sup>2</sup>)
- Power : 110/220V 1/2HP 1/4", 3/8"PT, NPT.
- 適合一般加壓馬達 1.2~2.4kg/cm<sup>2</sup> (接受指定設壓 0.5~3.5kg/cm<sup>2</sup>)。
- 使用電壓：110/220V 1/2HP 1/4", 3/8"PT, NPT.



Pat No.199062

水位開關

## ST-99AB Water Level Switch

- 3/4" threads, fittings Dual floats (one heavy and one light each) with steady center. Ventilated case covering main unit with separated arm for function free of moisture effect.
- Power : 110/220V 1HP, Contacts A and B, single throw.
- 3/4" 牙頭，雙浮球 (一種一輕)，中心穩定。
- 透氣式，開關主體、拉桿分離，功能不致受水氣影響。
- 使用電壓：110/220V 1HP 單切、雙能、A.B.接點。



72-1 低壓開關

72-2 低壓開關

## STR-72 Low Pressure Switch


- Suitable for low pressure household pumps. (Accept your specified pressure between 0.1~0.6kg/cm<sup>2</sup>)
- Power : 110/220V 1/2HP, 1/4", 3/8"PT, NPT.
- 適合低壓或家庭用RO汞浦 (接受指定設壓 0.1~0.6kg/cm<sup>2</sup>)。
- 使用電壓：110/220V 1/2HP 1/4", 3/8"PT, NPT.



單浮球污水開關

## ST-75 Single Float Switch

- Suitable for sewage, concentrated solution, etc., Completed with water-proof cable, and level adjusting bob.
- Power : 110/220V 10 - 5A, Contacts A and B.
- 適用污水、濃厚液體、防水電纜5米、附有定位簡單液位調整錘。
- 使用電壓：110/220V 1/2HP AB接點。

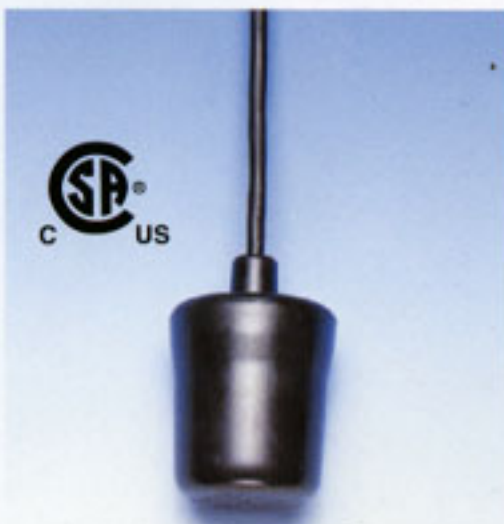

單浮球污水開關

## ST-75-1 Float Switch


- For deep-water pumping out control.
- Power : 110/220 volt max. Load 1/2 HP. Waterproof cord 1M.
- 適用沉水幫浦排水用。
- 使用電壓：110/220V 1/2HP MAX防水電纜 5M。



單浮球污水開關

## ST-75M Float Switch

- For deep-water pumping out control.
- Power : 1/3 HP. Waterproof cord 5M.
- 適用沉水幫浦排水用。
- 使用電壓：AC110V/3A DC30V/2A 1/3HP MAX防水電纜 5M。

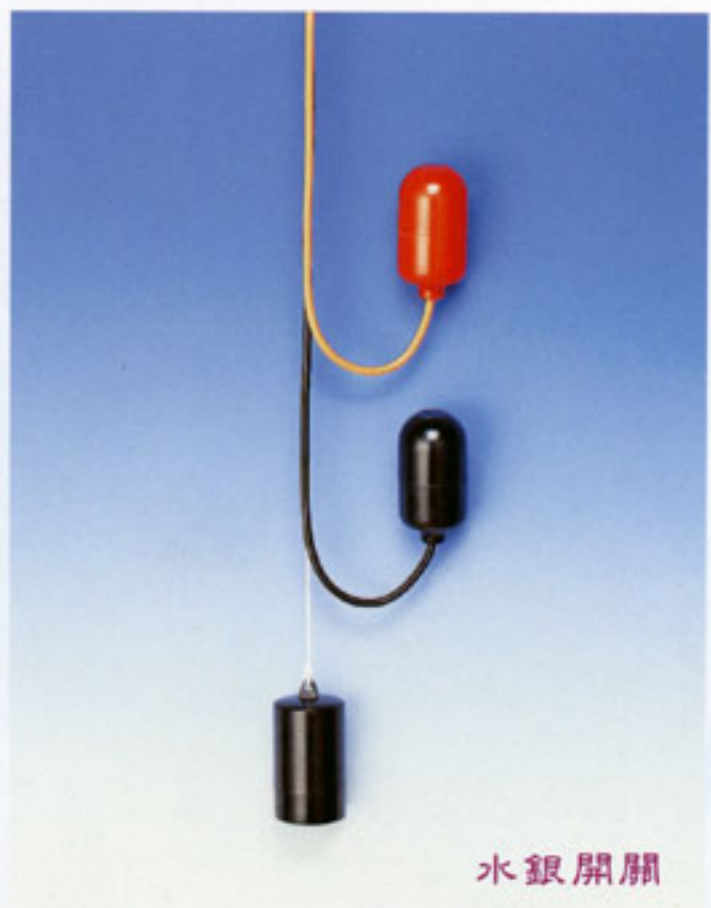

水銀開關

## ST-77 Mercury Switch

- For control pumping out sewage, thick fluid or liquid with floating matters. Float controls may be fitted up/down level limit for warning or indication signal.
- Power : DC 50 volt 0.1 amp.
- Waterproof cord 5 M. Attached.
- 適合污水及濃厚液體、水池排水用，可加裝浮球上下限警報或指示，(不可直接控制，需配合液面控制器使用)。
- 使用電壓：DC50V/0.1A。
- 防水電纜 5M



保持器

## Electrode Rod Set

- 3p Electrode Holder with stainless steel rods.

- Fixed pressure may be pre-set for all switches on request.
- Length of ST-75 cable may be extended to meet specific requirement.
- 各種壓力開關均可按各類不同機型的需要，指定設壓。
- ST-75 電線長度可依客戶需要加長。

上偉科技



# RADAR 雷達牌產品系列 PRODUCT SERIES

LIQUID LEVEL CONTROL SWITCH  
PRESSURE CONTROL SWITCH

液面控制器  
壓力開關



## 公司簡介

新東電子工業股份有限公司創業於1966年，生產雷達牌系列液面控制器。  
雷達牌為本公司國際註冊商標，保障本公司以及其客戶之權益，並確保  
產品之品質精準耐用。

## COMPANY PROFILE

Established since 1966, SHINTUNG Electronic Industry Company is a manufacturer of  
**RADAR** electric control switches.

**RADAR** is a trade mark registered world-wide for right protection and assures our customers  
for a long lasting accurate service of all switches.

新東電子工業股份有限公司  
SHIN TUNG ELECTRONIC INDUSTRY CO., LTD.